

**OSAS + OSM** = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER



Il nuovo codice sarà fornito solo ad esaurimento del vecchio  
 The new code will be supplied only when the old will be out of stock  
 Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist  
 Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé  
 El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo  
 O novo código irá ser fornecido apenas quando o antigo esgotar stock

**ACTIVE SAFETY**




OSAS



USAS



OPAS

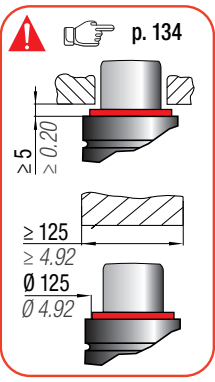


**easu** MANIFOLD p. 247

\*  $F_{1i}$  = Isothermal end force at 100% Cu p. 16  
 \*\*  $F_{1p}$  = Polytrophic end force at 100% Cu

N <sub>2</sub>	0 - 80 °C 32 - 176 °F	$\Delta P$ ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 63,62 cm <sup>2</sup> 9.861 in <sup>2</sup>	SPM ~ 15 - 80 (at 20°C)	Max Speed 1,8 m/s 70.8 in/s	Maintenance kit 39BMH09500C
----------------	--------------------------	---------------------------	------------------------------	----------------------------	---	-------------------------------	-----------------------------------	--------------------------------

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F <sub>0</sub> Initial force		F <sub>1i</sub> * End force *		F <sub>1p</sub> ** End force **		V <sub>0</sub>		PED 2014/68/EU		
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm <sup>3</sup>	in <sup>3</sup>	-Kg	-lb	✓
H 9500 - 025 - C	H 9500 - 025 - D	25	0.98	205	8.07	180	7.09	9540 ± 5%	21446	12146	27306	13759	30931	867	52.89	18,00	39.68	✓
H 9500 - 038 - C	H 9500 - 038 - D	38	1.50	231	9.09	193	7.60			12927	29061	14945	33598	1074	65.53	18,82	41.49	✓
H 9500 - 050 - C	H 9500 - 050 - D	50	1.97	255	10.04	205	8.07			13470	30282	15785	35485	1265	77.18	19,58	43.17	✓
H 9500 - 063 - C	H 9500 - 063 - D	63	2.48	281	11.06	218	8.58			13930	31315	16504	37103	1472	89.82	20,41	45.00	✓
H 9500 - 075 - C	H 9500 - 075 - D	75	2.95	305	12.01	230	9.06			14270	32081	17042	38311	1663	101.48	21,17	46.67	✓
H 9500 - 080 - C	H 9500 - 080 - D	80	3.15	315	12.40	235	9.25			14394	32358	17238	38752	1743	106.34	21,49	47.38	✓
H 9500 - 100 - C	H 9500 - 100 - D	100	3.94	355	13.98	255	10.04			14806	33285	17896	40232	2061	125.78	22,76	50.18	✓
H 9500 - 125 - C	H 9500 - 125 - D	125	4.92	405	15.94	280	11.02			15189	34147	18515	41622	2459	150.07	24,35	53.68	✓
H 9500 - 150 - C	H 9500 - 150 - D	150	5.91	455	17.91	305	12.01			15478	34795	18983	42674	2857	174.36	25,94	57.19	✓
H 9500 - 160 - C	H 9500 - 160 - D	160	6.30	475	18.70	315	12.40			15574	35012	19139	43027	3017	184.08	26,58	58.60	✓
H 9500 - 175 - C	H 9500 - 175 - D	175	6.89	505	19.88	330	12.99	15702	35300	19349	43498	3255	198.66	27,53	60.69	✓		
H 9500 - 200 - C	H 9500 - 200 - D	200	7.87	555	21.85	355	13.98	15882	35704	19644	44161	3654	222.96	29,12	64.20	✓		
H 9500 - 250 - C	H 9500 - 250 - D	250	9.84	655	25.79	405	15.94	16152	36311	20088	45161	4450	271.54	32,30	71.21	✓		
H 9500 - 300 - C	H 9500 - 300 - D	300	11.81	755	29.72	455	17.91	16345	36746	20408	45879	5246	320.13	35,47	78.20	✓		

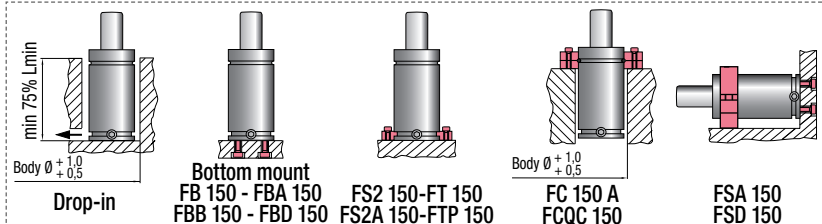

**HOW TO ORDER** p. 135  
**INSTALLATION GUIDELINE** p. 205