

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera épuisé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock

easu MANIFOLD p. 247

* F_{1i} = Isothermal end force at 100% Cu p. 16

** F_{1p} = Polythropic end force at 100% Cu




ACTIVE SAFETY



		100 - 120°C 212 - 248°F	ΔP ± 0,33 %/°C	P max 115 bar 1668 psi	P min 20 bar 290 psi	S 6,15 cm ² 0.953 in ²	SPM ~ 5 - 20	Max Speed 1 m/s 39.4 in/s	Maintenance kit 39BMT01000A			
CODE		Cu	L	L min	F₀		F_{1i} *		F_{1p} **		V₀	
PHASING OUT from 04/2021	NEW	mm inch	mm inch	mm inch	daN lb	daN lb	daN lb	daN lb	cm ³ in ³	~Kg ~lb	~lb	2014/68/EU
HT 1000-013-A-T2	HT 1000-013-B-T2	13 0.50	120,7 4.74	107,7 4.24			1206 2712	1393 3133	40 2.47	1,21 2.67	✓	
HT 1000-025-A-T2	HT 1000-025-B-T2	25 0.98	145 5.71	120 4.72			1322 2971	1585 3563	59 3.60	1,32 2.91	✓	
HT 1000-038-A-T2	HT 1000-038-B-T2	38 1.50	171 6.73	133 5.24			1398 3142	1715 3856	79 4.81	1,43 3.15	✓	
HT 1000-050-A-T2	HT 1000-050-B-T2	50 1.97	195 7.68	145 5.71			1444 3247	1797 4039	97 5.92	1,53 3.37	✓	
HT 1000-063-A-T2	HT 1000-063-B-T2	63 2.48	221 8.74	158 6.22	705 1585		1480 3328	1860 4181	117 7.13	1,64 3.62	✓	
HT 1000-075-A-T2	HT 1000-075-B-T2	75 2.95	245 9.65	170 6.69	+ 20°C		1505 3383	1904 4280	135 8.24	1,74 3.84	✓	
HT 1000-080-A-T2	HT 1000-080-B-T2	80 3.15	255 10.04	175 6.89	+ 68°F		1514 3403	1919 4315	143 8.70	1,78 3.92	✓	
HT 1000-100-A-T2	HT 1000-100-B-T2	100 3.94	295 11.61	195 7.68			1541 3465	1969 4426	173 10.56	1,96 4.32	✓	
HT 1000-125-A-T2	HT 1000-125-B-T2	125 4.92	345 13.58	220 8.66	940 2113		1565 3519	2012 4524	211 12.88	2,17 4.78	✓	
HT 1000-150-A-T2	HT 1000-150-B-T2	150 5.91	395 15.55	245 9.65	+ 120°C		1582 3557	2043 4593	249 15.20	2,38 5.25	✓	
HT 1000-160-A-T2	HT 1000-160-B-T2	160 6.30	415 16.34	255 10.04	+ 248°F		1588 3570	2053 4616	264 16.13	2,46 5.42	✓	
HT 1000-175-A-T2	HT 1000-175-B-T2	175 6.89	445 17.52	270 10.63			1595 3586	2067 4646	287 17.52	2,59 5.71	✓	
HT 1000-200-A-T2	HT 1000-200-B-T2	200 7.87	495 19.49	295 11.61			1605 3608	2085 4687	325 19.84	2,79 6.15	✓	
HT 1000-250-A-T2	HT 1000-250-B-T2	250 9.84	595 23.43	345 13.58			1619 3641	2111 4746	401 24.48	3,21 7.08	✓	
HT 1000-300-A-T2	HT 1000-300-B-T2	300 11.81	695 27.36	395 15.55			1629 3663	2130 4788	477 29.13	3,63 8.00	✓	

◆ Disposable

End force at 120°C / 248°F

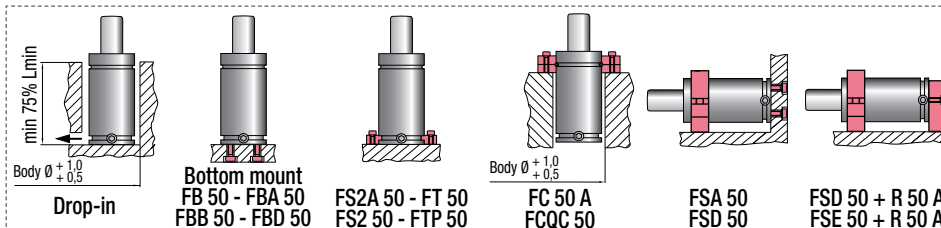

HOW TO ORDER

p. 149

INSTALLATION GUIDELINE

p. 205