

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

Il nuovo codice sarà fornito solo ad esaurimento del vecchio


The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock

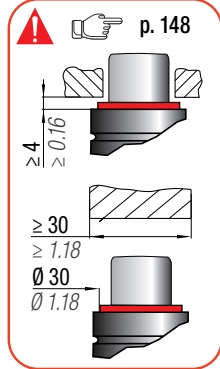

easu MANIFOLD p. 247

* F_{1i} = Isothermal end force at 100% Cu p. 16

** F_{1p} = Polytrophic end force at 100% Cu



ACTIVE SAFETY




		100 - 120 °C 212 - 248 °F	ΔP ± 0,33 %/°C	P max 115 bar 1668 psi	P min 20 bar 290 psi	S 3,14 cm ² 0.487 in ²	SPM ~ 5 - 20	Max Speed 1 m/s 39.4 in/s	Maintenance kit 39BMMMGS00038B
--	--	------------------------------	---------------------------	-------------------------------------	-----------------------------------	---	------------------------	--	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0 Initial force		F1i *		F1p **		V0		PED 2014/68/EU		
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	-Kg	-lb	✓
HT 500 - 010 - A - T2	HT 500 - 010 - B - T2	10	0.39	70	2.76	60	2.36			631	1419	737	1656	14,5	0.88	0,31	0.68	✓
HT 500 - 013 - A - T2	HT 500 - 013 - B - T2	13	0.51	75,7	2.98	62,7	2.47			655	1473	777	1746	16,9	1.03	0,32	0.71	✓
HT 500 - 016 - A - T2	HT 500 - 016 - B - T2	16	0.63	82	3.23	66	2.60	360	809	669	1504	800	1798	19,7	1.20	0,34	0.75	✓
HT 500 - 019 - A - T2	HT 500 - 019 - B - T2	19	0.75	88	3.46	69	2.72			666	1498	795	1787	23,6	1.44	0,35	0.77	✓
HT 500 - 025 - A - T2	HT 500 - 025 - B - T2	25	0.98	100	3.94	75	2.95			703	1579	857	1926	27,3	1.67	0,38	0.84	✓
HT 500 - 038 - A - T2	HT 500 - 038 - B - T2	38	1.50	126	4.96	88	3.46			729	1640	903	2031	38,4	2.34	0,44	0.97	✓
HT 500 - 050 - A - T2	HT 500 - 050 - B - T2	50	1.97	150	5.91	100	3.94	480	1079	744	1673	929	2089	48,6	2.97	0,50	1.10	✓
HT 500 - 063 - A - T2	HT 500 - 063 - B - T2	63	2.48	176,5	6.95	113,5	4.47			752	1691	944	2121	60,0	3.66	0,56	1.23	✓
HT 500 - 080 - A - T2	HT 500 - 080 - B - T2	80	3.15	210	8.27	130	5.12			764	1718	964	2168	74,1	4.52	0,64	1.41	✓
HT 500 - 100 - A - T2	HT 500 - 100 - B - T2	100	3.94	250	9.84	150	5.91			771	1734	977	2198	91,2	5.57	0,73	1.61	✓
HT 500 - 125 - A - T2	HT 500 - 125 - B - T2	125	4.92	300	11.81	175	6.89			778	1749	990	2225	112,3	6.85	0,85	1.87	✓

◆ Disposable

End force at 120°C / 248°F

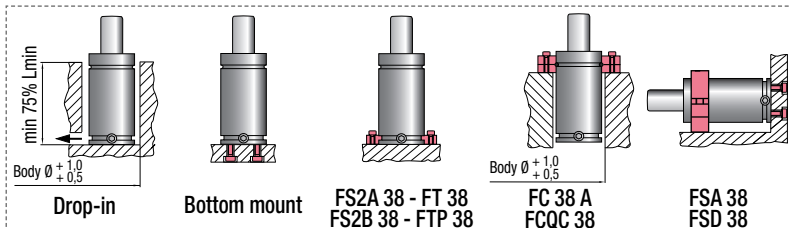

HOW TO ORDER

p. 149

INSTALLATION GUIDELINE

p. 205