

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock

**easu** MANIFOLD p. 247

\*  $F_{1i} =$

Isothermal end force p. 16  
at 100% Cu

\*\*  $F_{1p} =$

Polytrophic end force   
at 100% Cu



**ACTIVE SAFETY**



OSAS



USAS





OPAS



SKUDO

CODE	Cu		L		L min		F <sub>0</sub>		F <sub>1i</sub> *		F <sub>1p</sub> **		V <sub>0</sub>		Maintenance kit		
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm <sup>3</sup>	in <sup>3</sup>	~Kg	~lb	
KE 750 - 006 - B	6	0.24	63	2.48	57	2.24	740	1664	1214	2729	1497	3365	8,6	0.52	0,23	0.51	✓
KE 750 - 010 - B	10	0.39	75	2.95	65	2.56	± 5%		1316	2958	1666	3745	12,7	0.78	0,25	0.55	✓
KE 750 - 016 - B	16	0.63	93	3.66	77	3.03			1395	3136	1800	4047	18,9	1.15	0,29	0.64	✓
KE 750 - 025 - B	25	0.98	120	4.72	95	3.74	150 bar		1453	3267	1901	4273	28,2	1.72	0,33	0.73	✓
KE 750 - 032 - B	32	1.26	140	5.51	108	4.25	2175psi		1499	3370	1980	4452	34,9	2.13	0,37	0.82	✓
KE 750 - 040 - B	40	1.57	165	6.50	125	4.92			1498	3369	1980	4450	43,7	2.67	0,42	0.92	✓
KE 750 - 050 - B	50	1.97	195	7.68	145	5.71	+ 20 °C +68 °F		1515	3405	2008	4515	54,0	3.30	0,47	1.04	✓

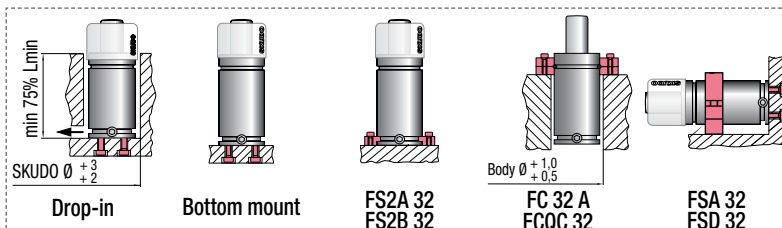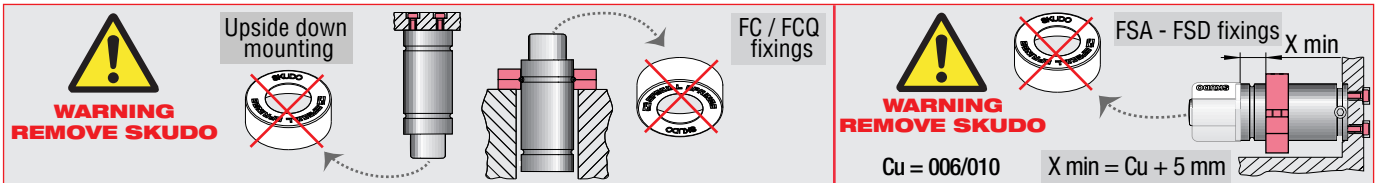

**HOW TO ORDER**

p. 195

**INSTALLATION GUIDELINE**

p. 205