

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock

* $F_{1i} =$

Isothermal end force at 100% Cu



p. 16

** $F_{1p} =$

Polytrophic end force at 100% Cu



ACTIVE SAFETY



OSAS




USAS



OPAS

CODE	PHASING OUT from 04/2021	NEW	ΔP		P max		P min		S		SPM		Max Speed		Maintenance kit	
			mm	inch	150 bar	2175 psi	20 bar	290 psi	63,61 cm ²	9.860 in ²	~ 15 - 60	(at 20°C)	1,8 m/s	70.8 in/s	39BMLS07500A	
LS 9500 - 025 - B	◆ LS 9500-025 - C		25	0.98	205	8.07	180	7.09								
LS 9500 - 038 - B	LS 9500-038 - C		38	1.50	231	9.09	193	7.60								
LS 9500 - 050 - B	LS 9500-050 - C		50	1.97	255	10.04	205	8.07	0	0	9540	21446	14107	31713	16783	37729
LS 9500 - 063 - B	LS 9500-063 - C		63,5	2.50	282	11.10	218,5	8.60	± 5%		± 5%		14650	32935	17647	39671
LS 9500 - 080 - B	LS 9500-080 - C		80	3.15	315	12.40	235	9.25					15138	34032	18432	41436
LS 9500 - 100 - B	LS 9500-100 - C		100	3.94	355	13.98	255	10.04	150 bar		150 bar		15568	34998	19129	43005
LS 9500 - 125 - B	LS 9500-125 - C		125	4.92	405	15.94	280	11.02	2175 psi		2175 psi		15952	35862	19759	44420
LS 9500 - 160 - B	LS 9500-160 - C		160	6.30	475	18.70	315	12.40	+ 20 °C		+ 20 °C		16323	36695	20371	45796
LS 9500 - 200 - B	LS 9500-200 - C		200	7.87	555	21.85	355	13.98	+68 °F		+68 °F		16610	37341	20848	46869
LS 9500 - 250 - B	LS 9500-250 - C		250	9.84	655	25.79	405	15.94					16855	37892	21258	47789
LS 9500 - 300 - B	LS 9500-300 - C		300	11.81	755	29.72	455	17.91					17027	38278	21545	48436

◆ Disposable

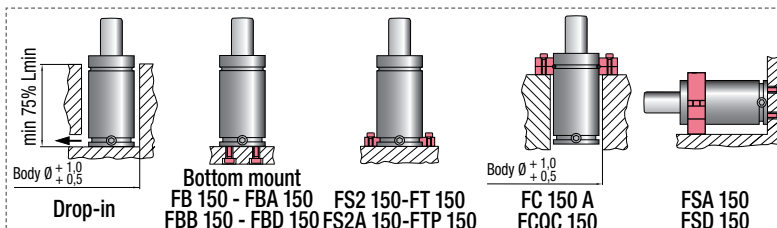

HOW TO ORDER

Hand icon p. 157

INSTALLATION GUIDELINE

Hand icon p. 205