



OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

ACTIVE SAFETY



OSAS



USAS






OPAS

Il nuovo codice sarà fornito solo ad esaurimento del vecchio
 The new code will be supplied only when the old will be out of stock
 Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist
 Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé
 El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo
 O novo código irá ser fornecido apenas quando o antigo esgotar stock

easu MANIPOL p. 247


* F_{1i} = Isothermal end force at 100% Cu p. 16

** F_{1p} = Polytrophic end force at 100% Cu

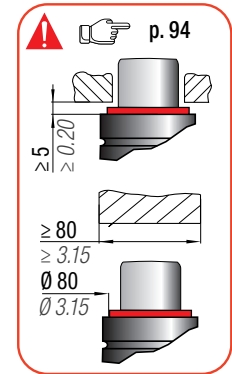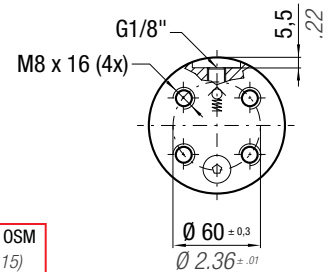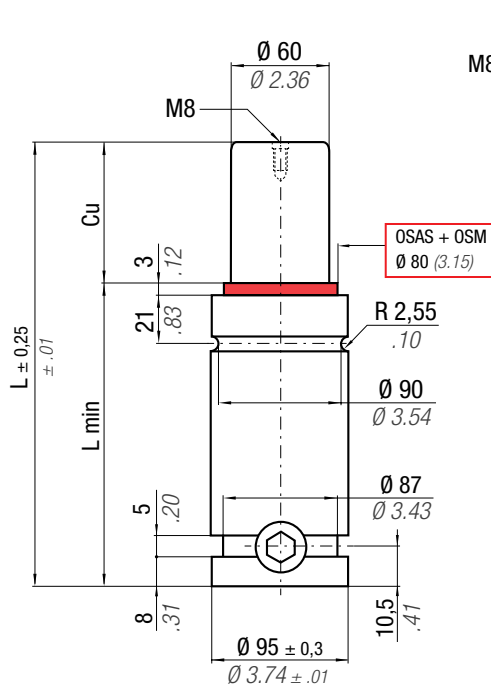

N ₂		0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 28,27 cm ² 4.382 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s 70.8 in/s	Maintenance kit 39BMRV04200C	
CODE	NEW	Cu	L	L min	F ₀	F _{1i} *	F _{1p} **	V ₀		
PHASING OUT from 04/2021		mm / inch	mm / inch	mm / inch	Initial force daN / lb	End force * daN / lb	End force ** daN / lb	cm ³ / in ³	~Kg / ~lb	2014/68/EU
RG 4200 - 016 - A	◆ RG 4200 - 016 - B	16 / 0.63	94 / 3.70	78 / 3.07	4240 / 9532 ± 5% 150 bar 2175 psi + 20 °C +68 °F	6103 / 13720	7197 / 16179	172 / 10.48	2,98 / 6.57	✓
RG 4200 - 019 - A	◆ RG 4200 - 019 - B	19 / 0.75	100 / 3.94	81 / 3.19		6269 / 14093	7458 / 16767	192 / 11.71	3,05 / 6.72	✓
RG 4200 - 025 - A	RG 4200 - 025 - B	25 / 0.98	112 / 4.41	87 / 3.43		6531 / 14682	7874 / 17702	232 / 14.18	3,20 / 7.05	✓
RG 4200 - 032 - A	RG 4200 - 032 - B	32 / 1.26	126 / 4.96	94 / 3.70		6755 / 15186	8236 / 18515	280 / 17.06	3,38 / 7.45	✓
RG 4200 - 038 - A	RG 4200 - 038 - B	38 / 1.50	138 / 5.43	100 / 3.94		6902 / 15517	8475 / 19052	320 / 19.52	3,52 / 7.76	✓
RG 4200 - 050 - A	RG 4200 - 050 - B	50 / 1.97	162 / 6.38	112 / 4.41		7117 / 16001	8827 / 19844	401 / 24.45	3,82 / 8.42	✓
RG 4200 - 063 - A	RG 4200 - 063 - B	63 / 2.48	188 / 7.40	125 / 4.92		7278 / 16361	9092 / 20440	488 / 29.80	4,15 / 9.15	✓
RG 4200 - 075 - A	RG 4200 - 075 - B	75 / 2.95	212 / 8.35	137 / 5.39		7386 / 16604	9272 / 20843	569 / 34.73	4,45 / 9.81	✓
RG 4200 - 080 - A	RG 4200 - 080 - B	80 / 3.15	222 / 8.74	142 / 5.59		7423 / 16687	9333 / 20982	603 / 36.79	4,57 / 10.08	✓
RG 4200 - 100 - A	RG 4200 - 100 - B	100 / 3.94	262 / 10.31	162 / 6.38		7539 / 16949	9529 / 21421	738 / 45.01	5,07 / 11.18	✓
RG 4200 - 125 - A	RG 4200 - 125 - B	125 / 4.92	312 / 12.28	187 / 7.36	7639 / 17173	9696 / 21798	906 / 55.29	5,69 / 12.54	✓	

◆ Disposable

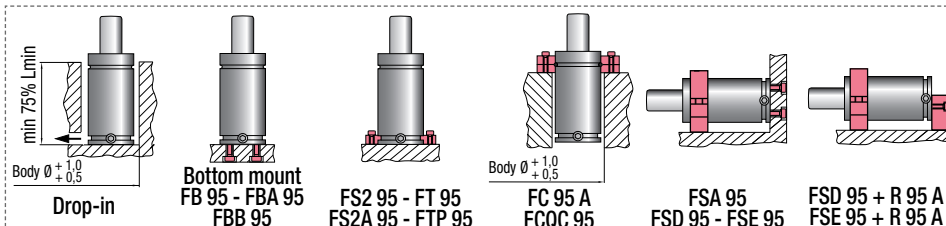

HOW TO ORDER

p. 95

INSTALLATION GUIDELINE

p. 205