

OSAS + OSM = **OVER STROKE ACTIVE SAFETY** + **OVER STROKE MARKER**

Il nuovo codice sarà fornito solo ad esaurimento del vecchio
 The new code will be supplied only when the old will be out of stock
 Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist
 Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé
 El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo
 O novo código irá ser fornecido apenas quando o antigo esgotar stock

ACTIVE SAFETY



OSAS



USAS




OPAS



SKUDO

easu MANIFOLD p. 247



* F_{1i} = Isothermal end force at 100% Cu p. 16
 ** F_{1p} = Polytrophic end force at 100% Cu



| | | | | | | | | |
|--|--------------------------|---------------------------|-------------------------------------|-----------------------------------|--|---------------------------------------|--|--|
| | 0 - 80 °C 32 - 176 °F | ΔP ± 0,33 %/°C | P max 150 bar 2175 psi | P min 20 bar 290 psi | S 10,18 cm ² 1.578 in ² | SPM ~ 20 - 100 (at 20°C) | Max Speed 1,8 m/s 70.8 in/s | Maintenance kit 39BMRV01500C |
|--|--------------------------|---------------------------|-------------------------------------|-----------------------------------|--|---------------------------------------|--|--|

| CODE PHASING OUT from 04/2021 | NEW | Cu | | L | | L min | | F0 Initial force | | F _{1i} * End force * | | F _{1p} ** End force ** | | V0 | | PED 2014/68/EU | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------------|---------------------|-----|------|-----|-------|-------|------|----------------------|------|----------------------------------|------|------------------------------------|-----|-----------------|-----------------|-------------------|-----|---------------------|------|------|------|------|----|------|------|------|---|------|------|------|------|----|------|------|------|---|------|------|------|------|----|------|------|------|---|------|------|------|------|-----|------|------|------|---|------|------|------|------|-----|------|------|------|---|------|------|------|------|-----|------|------|------|---|------|------|------|------|-----|-------|------|------|---|------|------|------|------|-----|-------|------|------|---|
| | | mm | inch | mm | inch | mm | inch | daN | lb | daN | lb | daN | lb | cm ³ | in ³ | ~Kg | ~lb | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS 1500 - 010 - B | ◆ RS 1500 - 010 - C | 10 | 0.39 | 70 | 2.76 | 60 | 2.36 | 1530 3440 ± 5% | 1981 | 4453 | 2258 | 5076 | 52 | 3.17 | 0,92 | 2.03 | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS 1500 - 013 - B | ◆ RS 1500 - 013 - C | 13 | 0.51 | 76 | 2.99 | 63 | 2.48 | | | | | | | | | | | 150 bar 2175 psi | 2057 | 4625 | 2374 | 5337 | 60 | 3.66 | 0,96 | 2.12 | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS 1500 - 016 - B | RS 1500 - 016 - C | 16 | 0.63 | 82 | 3.23 | 66 | 2.60 | | | | | | | | | | | | | | | | | | | | | 2119 | 4764 | 2470 | 5552 | 68 | 4.15 | 0,99 | 2.18 | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS 1500 - 022 - B | RS 1500 - 022 - C | 22 | 0.87 | 94 | 3.70 | 72 | 2.83 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 2214 | 4978 | 2618 | 5885 | 83 | 5.06 | 1,06 | 2.34 | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS 1500 - 029 - B | RS 1500 - 029 - C | 29 | 1.14 | 108 | 4.25 | 79 | 3.11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 2294 | 5156 | 2743 | 6166 | 102 | 6.22 | 1,14 | 2.51 | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS 1500 - 035 - B | RS 1500 - 035 - C | 35 | 1.38 | 120 | 4.72 | 85 | 3.35 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 2344 | 5270 | 2824 | 6348 | 118 | 7.20 | 1,21 | 2.67 | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS 1500 - 047 - B | RS 1500 - 047 - C | 47 | 1.85 | 144 | 5.67 | 97 | 3.82 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 2417 | 5433 | 2940 | 6610 | 149 | 9.09 | 1,35 | 2.98 | ✓ | | | | | | | | | | | | | | | | | | |
| RS 1500 - 060 - B | RS 1500 - 060 - C | 60 | 2.36 | 170 | 6.69 | 110 | 4.33 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 2470 | 5552 | 3026 | 6803 | 184 | 11.23 | 1,51 | 3.33 | ✓ | | | | | | | | | |
| RS 1500 - 072 - B | RS 1500 - 072 - C | 72 | 2.83 | 194 | 7.64 | 122 | 4.80 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 2505 | 5631 | 3083 | 6931 | 215 | 13.12 | 1,65 | 3.64 | ✓ |
| RS 1500 - 077 - B | RS 1500 - 077 - C | 77 | 3.03 | 204 | 8.03 | 127 | 5.00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS 1500 - 097 - B | RS 1500 - 097 - C | 97 | 3.82 | 244 | 9.61 | 147 | 5.79 | + 20 °C + 68 °F | 2554 | 5741 | 3164 | 7112 | 281 | 17.15 | 1,94 | 4.28 | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS 1500 - 122 - B | RS 1500 - 122 - C | 122 | 4.80 | 294 | 11.57 | 172 | 6.77 | | 2585 | 5811 | 3215 | 7228 | 347 | 21.18 | 2,23 | 4.92 | ✓ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

◆ Disposable

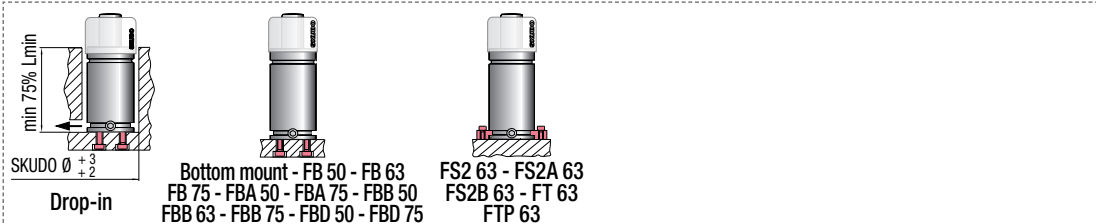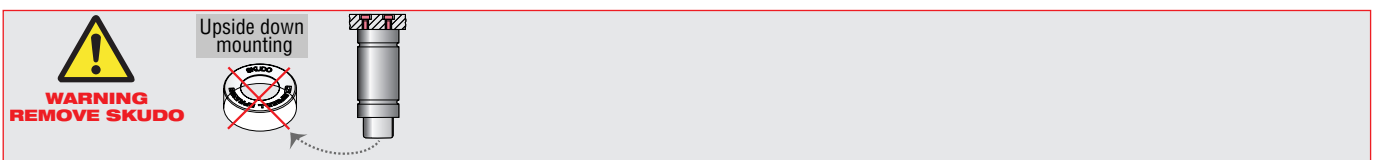

HOW TO ORDER p. 73
INSTALLATION GUIDELINE p. 205