



**OSAS + OSM** = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

## ACTIVE SAFETY



OSAS



USAS



OPAS

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo




O novo código irá ser fornecido apenas quando o antigo esgotar stock

\*  $F_{1i} =$

Isothermal end force at 100% Cu p. 16


\*\*  $F_{1p} =$

Polytropic end force at 100% Cu

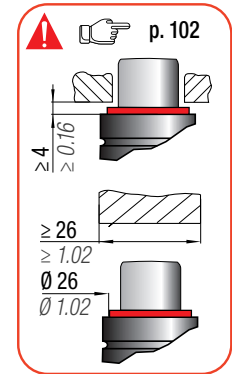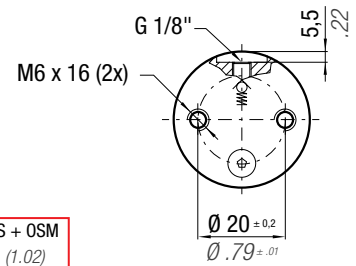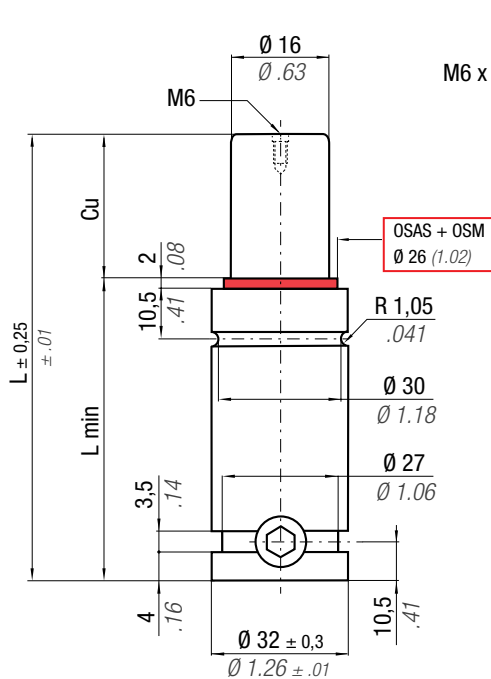

N <sub>2</sub>		0 - 80 °C 32 - 176 °F	$\Delta P$ ± 0,33 %/°C	P max 180 bar 2610 psi	P min 20 bar 290 psi	S 2,01 cm <sup>2</sup> 0,312 in <sup>2</sup>	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s 70,8 in/s	Maintenance kit 39BMRV00350C																																											
CODE PHASING OUT from 04/2021	NEW	Cu	L	L min	F <sub>0</sub>	F <sub>1i</sub> *	F <sub>1p</sub> **	V <sub>0</sub>																																												
RT 350 - 010 - A	♦ RT 350 - 010 - B	10 0.39	60 2.36	50 1.97	360 809 ± 5%	531 1194	607 1366	7,7 0.47	0,22 0.48	✓																																										
RT 350 - 013 - A	♦ RT 350 - 013 - B	13 0.51	66 2.60	53 2.09							180 bar 2610psi	544 1224	627 1409	9,5 0.58	0,23 0.50	✓																																				
RT 350 - 016 - A	RT 350 - 016 - B	16 0.63	72 2.83	56 2.20													+ 20 °C +68 °F	554 1245	641 1440	11,2 0.68	0,24 0.52	✓																														
RT 350 - 019 - A	RT 350 - 019 - B	19 0.75	78 3.07	59 2.32																			561 1261	651 1463	13,0 0.79	0,25 0.54	✓																									
RT 350 - 025 - A	RT 350 - 025 - B	25 0.98	90 3.54	65 2.56																								571 1283	665 1496	16,6 1.01	0,27 0.60	✓																				
RT 350 - 032 - A	RT 350 - 032 - B	32 1.26	104 4.09	72 2.83																													578 1300	676 1520	20,7 1.26	0,29 0.64	✓															
RT 350 - 038 - A	RT 350 - 038 - B	38 1.50	116 4.57	78 3.07																																		583 1310	683 1535	24,3 1.48	0,31 0.68	✓										
RT 350 - 050 - A	RT 350 - 050 - B	50 1.97	140 5.51	90 3.54																																							589 1323	691 1554	31,4 1.92	0,35 0.77	✓					
RT 350 - 063 - A	RT 350 - 063 - B	63 2.48	166 6.54	103 4.06																																												593 1333	697 1568	39,1 2.39	0,39 0.86	✓
RT 350 - 075 - A	RT 350 - 075 - B	75 2.95	190 7.48	115 4.53																																																
RT 350 - 080 - A	RT 350 - 080 - B	80 3.15	200 7.87	120 4.72	596 1340	702 1579	49,2 3.00	0,45 0.99	✓																																											
RT 350 - 100 - A	RT 350 - 100 - B	100 3.94	240 9.45	140 5.51						599 1346	706 1588	61,1 3.73	0,51 1.12	✓																																						
RT 350 - 125 - A	RT 350 - 125 - B	125 4.92	290 11.42	165 6.50											606 1363	717 1613	74,9 4.57	0,59 1.30	✓																																	

♦ Disposable

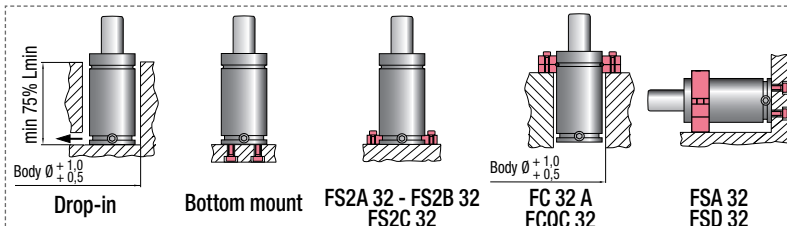

**HOW TO ORDER**  
p. 103

**INSTALLATION GUIDELINE**  
 p. 205