



OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

ACTIVE SAFETY

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock



OSAS



USAS






OPAS

easu MANIPOL p. 247


* F_{1i} = Isothermal end force at 100% Cu p. 16

** F_{1p} = Polytropic end force at 100% Cu

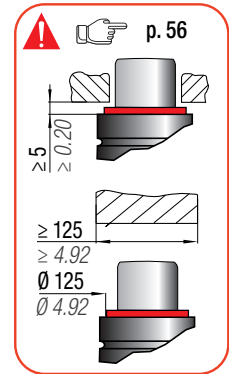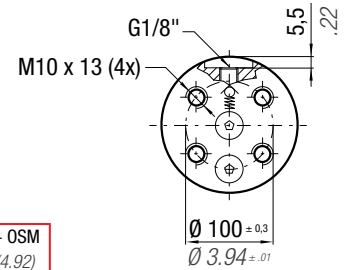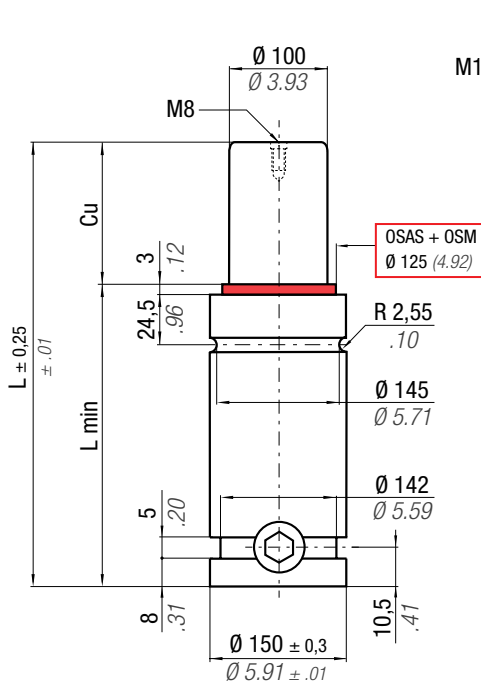

N ₂		0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 78,54 cm ² 12.173 in ²	SPM ~ 20 - 80 (at 20°C)	Max Speed 1,8 m/s 70.8 in/s	Maintenance kit 39BMRV12000A	
CODE PHASING OUT from 04/2021	NEW	Cu	L	L min	F ₀	F _{1i} *	F _{1p} **	V ₀		
		mm / inch	mm / inch	mm / inch	daN / lb	daN / lb	daN / lb	cm ³ / in ³	~Kg / ~lb	
RV 12000 - 019 - A	♦ RV 12000 - 019 - B	19 / 0.75	116 / 4.57	97 / 3.82	11780 / 26470 ± 5% 150 bar 2175 psi + 20 °C +68 °F	16936 / 38075	19966 / 44886	568 / 34.66	9,34 / 20.59	✓
RV 12000 - 025 - A	RV 12000 - 025 - B	25 / 0.98	128 / 5.04	103 / 4.06		17789 / 39991	21311 / 47910	671 / 40.95	9,73 / 21.45	✓
RV 12000 - 032 - A	RV 12000 - 032 - B	32 / 1.26	142 / 5.59	110 / 4.33		18565 / 41737	22555 / 50706	791 / 48.27	10,18 / 22.44	✓
RV 12000 - 038 - A	RV 12000 - 038 - B	38 / 1.50	154 / 6.06	116 / 4.57		19098 / 42935	23419 / 52648	894 / 54.56	10,57 / 23.30	✓
RV 12000 - 050 - A	RV 12000 - 050 - B	50 / 1.97	178 / 7.01	128 / 5.04		19916 / 44772	24759 / 55659	1101 / 67.19	11,35 / 25.02	✓
RV 12000 - 063 - A	RV 12000 - 063 - B	63 / 2.48	204 / 8.03	141 / 5.55		20555 / 46210	25820 / 58045	1324 / 80.80	12,20 / 26.90	✓
RV 12000 - 075 - A	RV 12000 - 075 - B	75 / 2.95	228 / 8.98	153 / 6.02		21001 / 47212	26566 / 59723	1531 / 93.43	12,97 / 28.59	✓
RV 12000 - 080 - A	RV 12000 - 080 - B	80 / 3.15	238 / 9.37	158 / 6.22		21157 / 47563	26829 / 60314	1617 / 98.68	13,30 / 29.32	✓
RV 12000 - 100 - A	RV 12000 - 100 - B	100 / 3.94	278 / 10.94	178 / 7.01		21659 / 48692	27677 / 62221	1961 / 119.67	14,60 / 32.19	✓
RV 12000 - 125 - A	RV 12000 - 125 - B	125 / 4.92	328 / 12.91	203 / 7.99		22101 / 49685	28430 / 63912	2391 / 145.91	16,22 / 35.76	✓

♦ Disposable

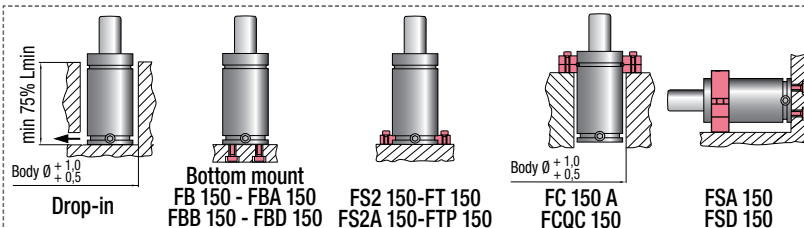

HOW TO ORDER

p. 57

INSTALLATION GUIDELINE

p. 205