

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER



Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguoguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock

ACTIVE SAFETY



OSAS



USAS



OPAS


easu MANIFOLD p. 247

* F_{1i} = Isothermal end force at 100% Cu p. 16

** F_{1p} = Polytrophic end force at 100% Cu

N ₂		0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 10,18 cm ² 1.578 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s 70.8 in/s	Maintenance kit 39BMRV01500C		
CODE	NEW	Cu	L	L min	F ₀	F _{1i} *	F _{1p} **	V ₀		PED 2014/68/EU	
PHASING OUT from 04/2021		mm inch	mm inch	mm inch	Initial force daN lb	End force * daN lb	End force ** daN lb	cm ³ in ³	~Kg ~lb	~lb	
RV 1500 - 010 - B	◆ RV 1500 - 010 - C	10 0.39	64 2.52	54 2.13	1530 3440 ± 5%	2089 4697	2424 5448	44 2.69	0,88 1.94	✓	
RV 1500 - 013 - B	◆ RV 1500 - 013 - C	13 0.51	70 2.76	57 2.24		2168 4874	2546 5723	52 3.17	0,91 2.01	✓	
RV 1500 - 016 - B	RV 1500 - 016 - C	16 0.63	76 2.99	60 2.36		2230 5012	2642 5939	60 3.66	0,96 2.12	✓	
RV 1500 - 019 - B	RV 1500 - 019 - C	19 0.75	82 3.23	63 2.48		2279 5123	2720 6114	68 4.15	0,99 2.18	✓	
RV 1500 - 025 - B	RV 1500 - 025 - C	25 0.98	94 3.70	69 2.72		2353 5290	2838 6380	84 5.13	1,06 2.34	✓	
RV 1500 - 032 - B	RV 1500 - 032 - C	32 1.26	108 4.25	76 2.99		2414 5426	2935 6599	102 6.22	1,14 2.51	✓	
RV 1500 - 038 - B	RV 1500 - 038 - C	38 1.50	120 4.72	82 3.23		150 bar 2175 psi	2452 5512	2997 6738	118 7.20	1,21 2.67	✓
RV 1500 - 050 - B	RV 1500 - 050 - C	50 1.97	144 5.67	94 3.70		2506 5633	3085 6935	149 9.09	1,36 3.00	✓	
RV 1500 - 063 - B	RV 1500 - 063 - C	63 2.48	170 6.69	107 4.21		2544 5720	3148 7078	184 11.23	1,52 3.35	✓	
RV 1500 - 075 - B	RV 1500 - 075 - C	75 2.95	194 7.64	119 4.69		+ 20 °C +68 °F	2570 5777	3190 7172	215 13.12	1,66 3.66	✓
RV 1500 - 080 - B	RV 1500 - 080 - C	80 3.15	204 8.03	124 4.88	2578 5797	3204 7204	229 13.97	1,72 3.79	✓		
RV 1500 - 100 - B	RV 1500 - 100 - C	100 3.94	244 9.61	144 5.67	2605 5857	3249 7303	281 17.15	1,95 4.30	✓		
RV 1500 - 125 - B	RV 1500 - 125 - C	125 4.92	294 11.57	169 6.65	2628 5907	3286 7387	347 21.18	2,24 4.94	✓		

◆ Disposable

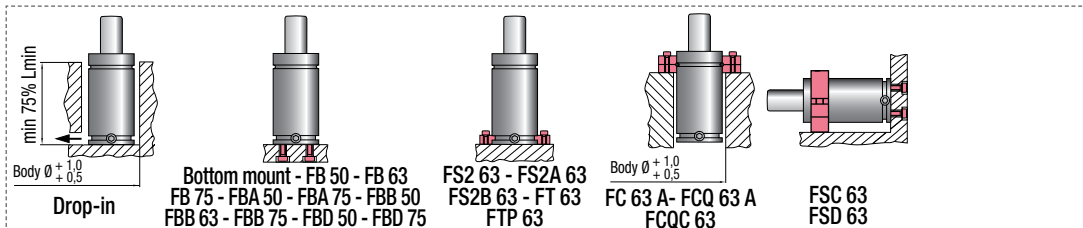

HOW TO ORDER

p. 57

INSTALLATION GUIDELINE

p. 205