

ISO 11901 - 3 B8 3180 220 000 004(MB)	VDI 3003 - Blatt 3 E24.54.815.G (PSA)	B2 4005 (BMW) 39D 997 (VW)	W-DX35-6204 (Ford)
--	--	-------------------------------	--------------------



OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

ACTIVE SAFETY



OSAS



USAS






OPAS

Il nuovo codice sarà fornito solo ad esaurimento del vecchio
The new code will be supplied only when the old will be out of stock
Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist
Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé
El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo
O novo código irá ser fornecido apenas quando o antigo esgotar stock

easu MANIPOL p. 247


* F_{1i} = Isothermal end force at 100% Cu p. 16
** F_{1p} = Polytropic end force at 100% Cu

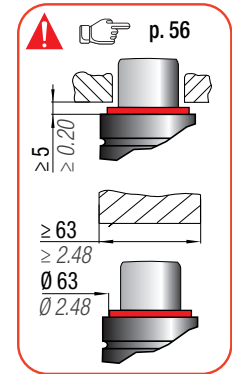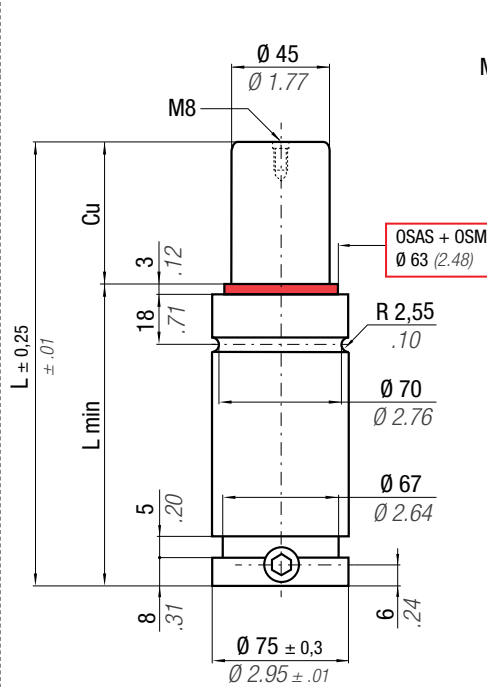

N ₂	0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 15,90 cm ² 2,465 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s 70,8 in/s	Maintenance kit 39BMRV02400D
----------------	--------------------------	---------------------------	------------------------------	----------------------------	---	--------------------------------	-----------------------------------	---------------------------------

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F ₀ Initial force		F _{1i} * End force *		F _{1p} ** End force **		V ₀		PED 2014/68/EU			
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³		~Kg	~lb	
RV 2400 - 010 - A	♦ RV 2400 - 010 - B	10	0.39	65	2.56	55	2.17	2385 ± 5%	5362	3279	7372	3810	8564	68	4.15	1,25	2.76	✓	
RV 2400 - 013 - A	♦ RV 2400 - 013 - B	13	0.51	71	2.80	58	2.28			3409	7663	4010	9015	80	4.88	1,30	2.87	✓	
RV 2400 - 016 - A	♦ RV 2400 - 016 - B	16	0.63	77	3.03	61	2.40			3510	7891	4170	9374	92	5.61	1,35	2.98	✓	
RV 2400 - 019 - A	♦ RV 2400 - 019 - B	19	0.75	83	3.27	64	2.52			3592	8075	4299	9665	104	6.35	1,40	3.09	✓	
RV 2400 - 025 - A	RV 2400 - 025 - B	25	0.98	95	3.74	70	2.76			3716	8354	4498	10111	128	7.81	1,50	3.31	✓	
RV 2400 - 032 - A	RV 2400 - 032 - B	32	1.26	109	4.29	77	3.03			3818	8583	4662	10481	156	9.52	1,61	3.55	✓	
RV 2400 - 038 - A	RV 2400 - 038 - B	38	1.50	121	4.76	83	3.27			150 bar	3883	8728	4767	10717	180	10.98	1,70	3.75	✓
RV 2400 - 050 - A	RV 2400 - 050 - B	50	1.97	145	5.71	95	3.74			2175 psi	3974	8935	4917	11054	228	13.91	1,89	4.17	✓
RV 2400 - 063 - A	RV 2400 - 063 - B	63	2.48	171	6.73	108	4.25			+ 20 °C +68 °F	4041	9083	5026	11299	280	17.09	2,10	4.63	✓
RV 2400 - 075 - A	RV 2400 - 075 - B	75	2.95	195	7.68	120	4.72				4084	9181	5098	11461	328	20.02	2,29	5.05	✓
RV 2400 - 080 - A	RV 2400 - 080 - B	80	3.15	205	8.07	125	4.92	4099	9215		5123	11517	348	21.24	2,37	5.22	✓		
RV 2400 - 100 - A	RV 2400 - 100 - B	100	3.94	245	9.65	145	5.71	4145	9318	5199	11688	428	26.12	2,68	5.91	✓			
RV 2400 - 125 - A	RV 2400 - 125 - B	125	4.92	295	11.61	170	6.69	4183	9405	5264	11833	528	32.22	3,07	6.77	✓			

♦ Disposable

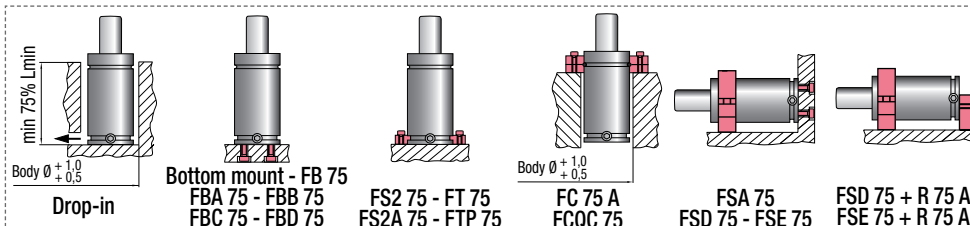

HOW TO ORDER

p. 57

INSTALLATION GUIDELINE

p. 205