

Il nuovo codice sarà fornito solo ad esaurimento del vecchio
 The new code will be supplied only when the old will be out of stock
 Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist
 Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé
 El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo
 O novo código irá ser fornecido apenas quando o antigo esgotar stock

* F_{1i} = Isothermal end force at 100% Cu
 ** F_{1p} = Polytrophic end force at 100% Cu
 p. 16



Collegabile con tubi
 Linkable with hoses
 Anschlussfähig mit Leitungen
 Conectable avec tubes
 Conectable con mangueras
 Acompláveis com tubos
 Micro 32°




ACTIVE SAFETY



	0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 180 bar 2610 psi	P min 20 bar 290 psi	S 1,77 cm ² 0.27 in ²	SPM ~ 40 - 100 (at 20°C)	Max Speed 1,8 m/s 70.8 in/s	Maintenance kit Disposable
--	--------------------------	---------------------------	-------------------------------------	-----------------------------------	--	---------------------------------------	--	--------------------------------------

CODE PHASING OUT from 01/2020	NEW	Cu		L		L min		F0 Initial force		F _{1i} * End force *		F _{1p} ** End force **		V0		PED 2014/68/EU		
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	-Kg	-lb	✓
RV 320 - 007 - B	RV 320 - 007 - C	7	0.28	44	1.73	37	1.46	320 719 ± 5% 180 bar 2610psi + 20 °C +68 °F		471	1059	540	1214	4,6	0.28	0,10	0.22	✓
RV 320 - 010 - B	RV 320 - 010 - C	10	0.39	50	1.97	40	1.57			495	1112	574	1291	6,0	0.37	0,10	0.23	✓
RV 320 - 013 - B	RV 320 - 013 - C	13	0.51	56	2.20	43	1.69			511	1148	598	1344	7,3	0.45	0,11	0.24	✓
RV 320 - 015 - B	RV 320 - 015 - C	15	0.59	60	2.36	45	1.77			519	1167	610	1371	8,2	0.50	0,11	0.24	✓
RV 320 - 019 - B	RV 320 - 019 - C	19	0.75	68	2.68	49	1.93			531	1195	628	1412	10,1	0.62	0,12	0.26	✓
RV 320 - 025 - B	RV 320 - 025 - C	25	0.98	80	3.15	55	2.17			544	1223	647	1454	12,8	0.78	0,13	0.28	✓
RV 320 - 032 - B	RV 320 - 032 - C	32	1.26	94	3.70	62	2.44			553	1244	661	1486	15,9	0.97	0,14	0.31	✓
RV 320 - 038 - B	RV 320 - 038 - C	38	1.50	106	4.17	68	2.68			559	1257	669	1505	18,6	1.14	0,15	0.33	✓
RV 320 - 050 - B	RV 320 - 050 - C	50	1.97	130	5.12	80	3.15			567	1274	681	1531	24,1	1.47	0,17	0.37	✓
RV 320 - 063 - B	RV 320 - 063 - C	63	2.48	156	6.14	93	3.66			572	1286	689	1549	29,9	1.82	0,19	0.42	✓
RV 320 - 075 - B	RV 320 - 075 - C	75	2.95	185	7.28	110	4.33			570	1282	686	1543	35,8	2.18	0,22	0.48	✓
RV 320 - 080 - B	RV 320 - 080 - C	80	3.15	195	7.68	115	4.53			572	1285	688	1548	38,1	2.33	0,23	0.50	✓
RV 320 - 100 - B	RV 320 - 100 - C	100	3.94	235	9.25	135	5.31			576	1295	695	1562	47,1	2.87	0,26	0.57	✓
RV 320 - 125 - B	RV 320 - 125 - C	125	4.92	285	11.22	160	6.30			580	1303	700	1574	58,4	3.56	0,30	0.66	✓

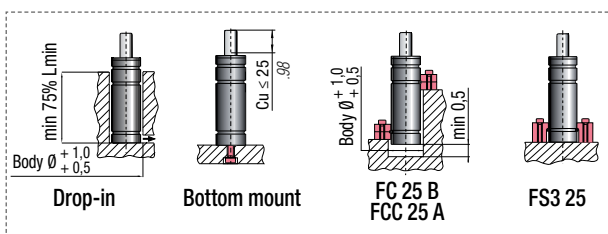

HOW TO ORDER
 p. 57
INSTALLATION GUIDELINE
 p. 205