

**OSAS + OSM** = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER



Il nuovo codice sarà fornito solo ad esaurimento del vecchio  
 The new code will be supplied only when the old will be out of stock  
 Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist  
 Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé  
 El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo  
 O novo código irá ser fornecido apenas quando o antigo esgotar stock

**ACTIVE SAFETY**



OSAS



USAS




OPAS

**easu** MANIFOLD p. 247

\*  $F_{1i}$  = Isothermal end force at 100% Cu p. 16  
 \*\*  $F_{1p}$  = Polytrophic end force at 100% Cu

N <sub>2</sub>		0 - 80 °C 32 - 176 °F	$\Delta P$ ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 4,91 cm <sup>2</sup> 0,761 in <sup>2</sup>	SPM ~ 30 - 80 (at 20°C)	Max Speed 1,8 m/s 70,8 in/s	Maintenance kit 39BMS00750B
CODE	NEW	Cu	L	L min	F <sub>0</sub>	F <sub>1i</sub> *	F <sub>1p</sub> **	V <sub>0</sub>	
PHASING OUT from 04/2021		mm inch	mm inch	mm inch	Initial force daN lb	End force * daN lb	End force ** daN lb	cm <sup>3</sup> in <sup>3</sup>	~Kg ~lb
S 750 - 006 - B	◆ S 750 - 006 - C	6 0.24	62 2.44	56 2.20	740 1664 ± 5% 150 bar 2175 psi + 20 °C +68 °F	906 2038	1016 2283	18,4 1.12	0,60 1.32
S 750 - 013 - B	◆ S 750 - 013 - C	13 0.51	76 2.99	63 2.48		994 2234	1147 2579	28,7 1.75	0,66 1.46
S 750 - 019 - B	S 750 - 019 - C	19 0.75	88 3.46	69 2.72		1035 2326	1211 2722	37,5 2.29	0,71 1.57
S 750 - 025 - B	S 750 - 025 - C	25 0.98	100 3.94	75 2.95		1062 2387	1253 2818	46,3 2.83	0,75 1.65
S 750 - 038 - B	S 750 - 038 - C	38 1.50	126 4.96	88 3.46		1098 2468	1309 2944	65,5 4.00	0,85 1.87
S 750 - 050 - B	S 750 - 050 - C	50 1.97	150 5.91	100 3.94		1117 2511	1340 3012	83,1 5.07	0,95 2.09
S 750 - 063 - B	S 750 - 063 - C	63 2.48	176 6.93	113 4.45		1130 2541	1362 3061	102,2 6.24	1,05 2.31
S 750 - 080 - B	S 750 - 080 - C	80 3.15	210 8.27	130 5.12		1142 2568	1381 3104	127,2 7.76	1,18 2.60
S 750 - 100 - B	S 750 - 100 - C	100 3.94	250 9.84	150 5.91		1152 2589	1396 3138	156,7 9.56	1,33 2.93
S 750 - 125 - B	S 750 - 125 - C	125 4.92	300 11.81	175 6.89		1159 2607	1408 3166	193,4 11.80	1,52 3.35

◆ Disposable

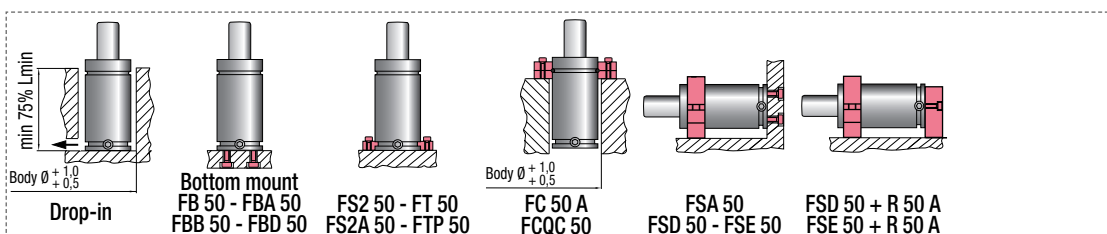

**HOW TO ORDER** p. 115  
**INSTALLATION GUIDELINE** p. 205