

075.90.55 (FCA)	B2 4006 (BMW)	B8 3180 220 000 001(MB)	E24.54.815.G (PSA)
EM24.54.700 (Renault)			



OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

ACTIVE SAFETY



OSAS



USAS



OPAS

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé




El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock

easu MANIFOLDO p. 247


* F_{1i} = Isothermal end force at 100% Cu p. 16

** F_{1p} = Polytropic end force at 100% Cu

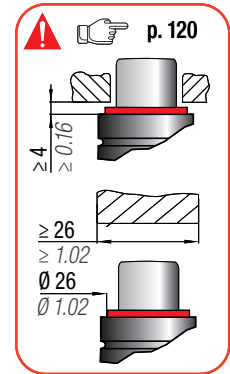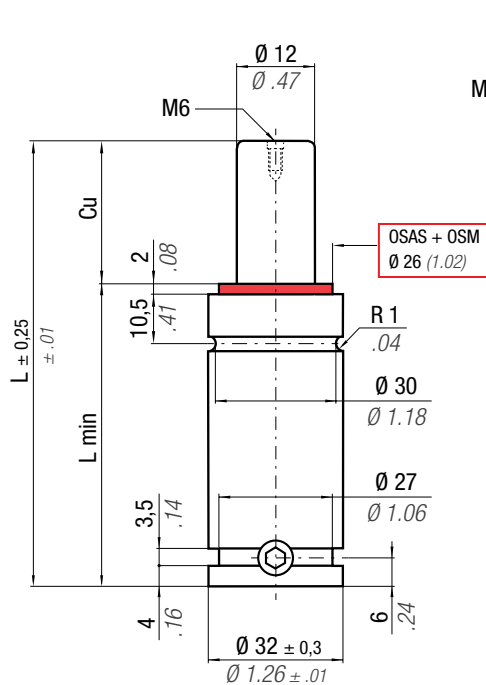

N ₂		0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 1,13 cm ² 0.175 in ²	SPM ~ 80 - 100 (at 20°C)	Max Speed 1,8 m/s 70.8 in/s	Maintenance kit 39BMSC00150E	
CODE PHASING OUT from 04/2021	NEW	Cu	L	L min	F ₀	F _{1i} *	F _{1p} **	V ₀		
SC 150 - 010 - D	♦ SC 150 - 010 - E	10 0.39	70 2.76	60 2.36	170 382 ± 5% 150 bar 2175 psi + 20 °C +68 °F	192 431 195 438 198 445 203 457 208 467 211 473 212 478 214 481 216 485 218 490	209 469 213 479 218 490 226 508 233 523 237 532 239 538 242 544 245 550 247 556	11,6 0.71 13,1 0.80 14,8 0.90 20,0 1.22 27,3 1.67 34,1 2.08 41,7 2.54 50,9 3.11 61,6 3.76 74,7 4.56	~Kg ~lb 0,28 0,62 0,29 0,64 0,30 0,66 0,33 0,73 0,36 0,79 0,40 0,88 0,44 0,97 0,49 1,08 0,55 1,21 0,64 1,41	✓
SC 150 - 013 - D	♦ SC 150 - 013 - E	12,7 0.51	75,4 2.97	62,7 2.47						
SC 150 - 016 - D	SC 150 - 016 - E	16 0.63	82 3.23	66 2.60						
SC 150 - 025 - D	SC 150 - 025 - E	25 0.98	100 3.94	75 2.95						
SC 150 - 038 - D	SC 150 - 038 - E	38 1.50	126 4.96	88 3.46						
SC 150 - 050 - D	SC 150 - 050 - E	50 1.97	150 5.91	100 3.94						
SC 150 - 063 - D	SC 150 - 063 - E	63,5 2.48	177 6.97	113,5 4.47						
SC 150 - 080 - D	SC 150 - 080 - E	80 3.15	210 8.27	130 5.12						
SC 150 - 100 - D	SC 150 - 100 - E	100 3.94	250 9.84	150 5.91						
SC 150 - 125 - D	SC 150 - 125 - E	125 4.92	300 11.81	175 6.89						

♦ Disposable

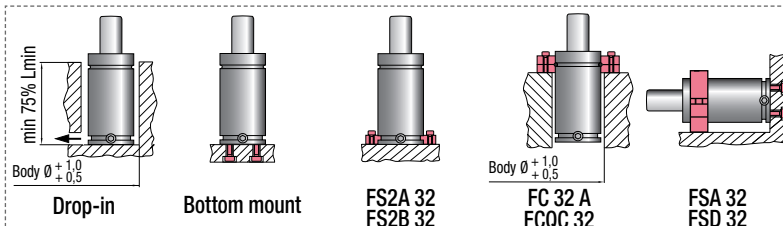

HOW TO ORDER p. 121

INSTALLATION GUIDELINE p. 205