

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER



Il nuovo codice sarà fornito solo ad esaurimento del vecchio
 The new code will be supplied only when the old will be out of stock
 Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist
 Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé
 El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo
 O novo código irá ser fornecido apenas quando o antigo esgotar stock

ACTIVE SAFETY



OSAS



USAS





OPAS

* F_{1i} = Isothermal end force at 100% Cu p. 16 ** F_{1p} = Polyphoric end force at 100% Cu

N ₂		0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 1,77 cm ² 0.274 in ²	SPM ~ 80 - 100 (at 20°C)	Max Speed 1,8 m/s 70.8 in/s	Maintenance kit 39BMSC00250E
CODE	NEW	Cu	L	L min	F ₀	F _{1i} *	F _{1p} **	V ₀	
PHASING OUT from 04/2021		mm / inch	mm / inch	mm / inch	Initial force daN / lb	End force * daN / lb	End force ** daN / lb	cm ³ / in ³	~Kg / ~lb
SCF 250 - 010 - D	◆ SCF 250 - 010 - E	10 / 0.39	70 / 2.76	60 / 2.36	260 / 585 ± 5%	305 / 685	334 / 750	16,0 / 0.98	0,37 / 0.81
SCF 250 - 013 - D	◆ SCF 250 - 013 - E	12,7 / 0.50	75,4 / 2.97	62,7 / 2.47		310 / 698	342 / 769	18,1 / 1.10	0,38 / 0.84
SCF 250 - 016 - D	SCF 250 - 016 - E	16 / 0.63	82 / 3.23	66 / 2.60		316 / 711	350 / 788	20,6 / 1.26	0,39 / 0.86
SCF 250 - 019 - D	SCF 250 - 019 - E	19 / 0.75	88 / 3.46	69 / 2.72		320 / 720	357 / 802	22,9 / 1.40	0,42 / 0.92
SCF 250 - 025 - D	SCF 250 - 025 - E	25 / 0.98	100 / 3.94	75 / 2.95		327 / 734	366 / 823	27,4 / 1.67	0,44 / 0.97
SCF 250 - 038 - D	SCF 250 - 038 - E	38 / 1.50	126 / 4.96	88 / 3.46		336 / 755	380 / 853	37,3 / 2.28	0,50 / 1.10
SCF 250 - 050 - D	SCF 250 - 050 - E	50 / 1.97	150 / 5.91	100 / 3.94		341 / 766	387 / 870	46,5 / 2.84	0,55 / 1.21
SCF 250 - 063 - D	SCF 250 - 063 - E	63,5 / 2.50	177 / 6.97	113,5 / 4.47		345 / 775	393 / 884	56,7 / 3.46	0,63 / 1.39
SCF 250 - 080 - D	SCF 250 - 080 - E	80 / 3.15	210 / 8.27	130 / 5.12		348 / 782	398 / 894	69,3 / 4.23	0,70 / 1.54
SCF 250 - 100 - D	SCF 250 - 100 - E	100 / 3.94	250 / 9.84	150 / 5.91		351 / 789	403 / 905	84,2 / 5.14	0,75 / 1.65
SCF 250 - 125 - D	SCF 250 - 125 - E	125 / 4.92	300 / 11.81	175 / 6.89	355 / 798	409 / 919	101,6 / 6.20	0,93 / 2.05	

◆ Disposable

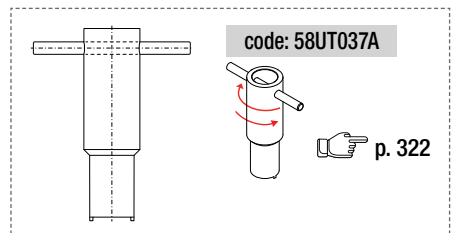

HOW TO ORDER
 p. 121

INSTALLATION GUIDELINE
 p. 205